

# W70B Quick Start


## Package Contents




W70B Base Station




Power Adapter



Base Stand



Ethernet Cable




Quick Start Guide

## Assemble W70B

### Procedure

1. Connect the base station power and the network using method a or method b.

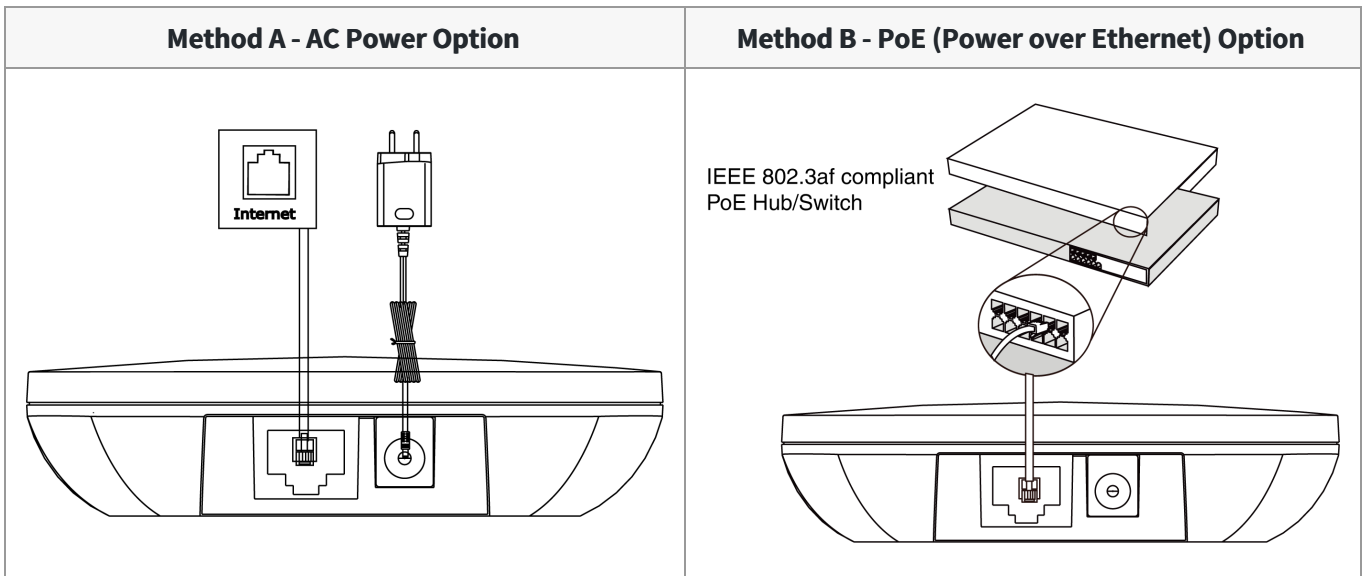


**TIP**

- If you choose method a, use Yealink supplied power adapter (5V/1.2A). A third-party power adapter may damage the device.
- If you choose method b, you do not need to connect the power adapter. Make sure the hub/switch is PoE-compliant.


2. Choose one of the following installation methods:

- o **(Desktop Installation)** Attach and remove the base stand.

a. Attach the Base Stand

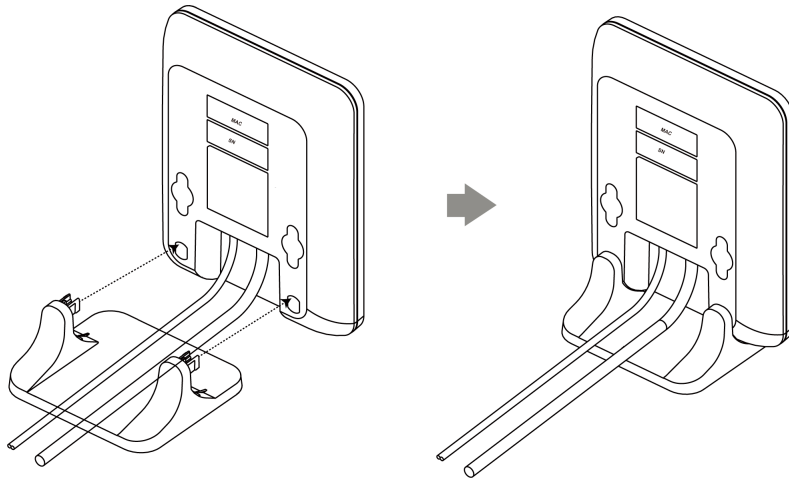

b. Remove the Base Stand

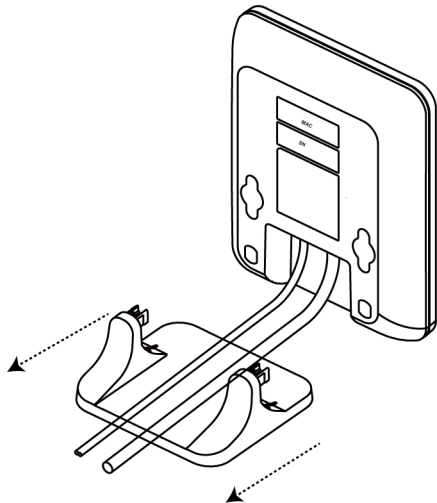


- o **(Wall-Mount Installation)** Attach the base station.

 Attach the base station.png)

**Hardware & LED Introduction**

After the base station starts up successfully and the handset is registered to the base station, all LEDs on the base station glow green.

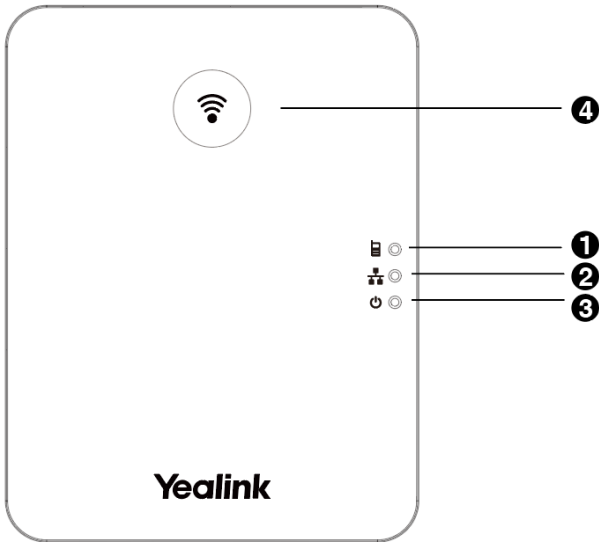

No.	Item	Description
1	Registration LED	Indicate the handset registration status or the base station is in the paging mode.
2	Network Status LED	Indicate the network status.
3	Power LED Indicator	Indicate the power status of the base station.
4	Paging Key	<ul style="list-style-type: none"> <li>• Locate a misplaced handset.</li> <li>• Toggle to select the registration mode.</li> <li>• Reset the base station to factory settings.</li> </ul>

If you want to see the power LED indicator of other devices, see the corresponding:

### Register Devices to W70B

See [Register Devices to W70B](#) for more information.

The table below lists the available devices that can be registered to W70B:

Supported Devices	Maximum Number of Paired Devices (Simultaneously)
-------------------	---

<ul style="list-style-type: none"><li>• W73H</li><li>• W78H</li><li>• W57R</li><li>• W59R</li><li>• W53H</li><li>• W56H</li><li>• CP930W</li><li>• CP935W</li><li>• DD Phone (T54W+DD10K)</li><li>• WH62/WH63</li><li>• WHM621/WHM622 with Charging Cable</li><li>• WHM631 with Charging Cable</li></ul>	10
--	----

## Obtain the IP address of W70B

### Prerequisites

You have registered devices to W70B.

### Procedure

1. Do one of the following:
  - For W73H/W56H/W59R/W53H/W57R/W78H, press the OK key and go to **Status > Base**.
  - For DD phone and CP930W-Base, press or tap the OK key when the phone is idle or go to **Menu > Status > Base Status**.
  - For CP935W-Base, go to **More > Status > Base Status**.

## Log In to the Web User Interface

### Procedure

1. Enter the IP address in the address bar of a web browser on your PC.  
  
For example, for IPv4: `http://192.168.0.10` or `192.168.0.10` ;  
  
for IPv6: `http://[2005:1:1:1:215:65ff:fe64:6e0a]` or `[2005:1:1:1:215:65ff:fe64:6e0a]` .
2. Enter the user name (default: admin) and password (default: admin).
3. Click **Login**.

## Register Accounts on W70B

You can register SIP accounts (including third-party services, like CUCM) on W70B.

### Before you begin

The number of registered accounts must meet the following requirements:

<b>Maximum accounts registered on the W70B</b>	<b>Maximum registered accounts assigned to W73H/W78H/W57R/W59R/W53H/W56H/DD Phone (T54W +DD10K)/CP930W/CP935W/WH62/WH63/WHM621/WHM622 with Charging Cable/WHM631 with Charging Cable</b>
10	10

**Procedure**

1. Log in to the web user interface of W70B as an admin.
2. Go to **Account > Register**.
3. Enter the account and server information.

The screenshot shows the 'Register' configuration page in the Yealink W70B web interface. The left sidebar contains navigation options: Admin, Status, Account, Register, Basic, Codec, Advanced, Number Assignment, Alarm Assignment, Network, Statistics, Features, Settings, Directory, Security, and About. The 'Account' menu item is highlighted, and the 'Register' sub-item is selected. The main content area is titled 'Register' and contains the following fields:

- Account:** A dropdown menu showing 'Account 1 (134001 : Registered)'.
- Register status:** A dropdown menu showing 'Registered'.
- Line Active:** A toggle switch that is currently turned on.
- Label:** A text input field containing '134001'.
- Display Name:** An empty text input field.
- Register Name:** A text input field containing '134001'.
- Username:** A text input field containing '134001'.
- Password:** A password input field with masked characters '.....'.
- SIP Server 1:**
  - Server Host:** A text input field containing '10.200.108.48'.
  - Port:** A text input field containing '5060'.
  - Transport:** A dropdown menu showing 'UDP'.
  - Server Expires:** A text input field containing '3600'.
  - Server Retry Counts:** A text input field containing '3'.
- SIP Server 2:**
  - Server Host:** An empty text input field.
  - Port:** A text input field containing '5060'.
  - Transport:** A dropdown menu showing 'UDP'.

At the bottom right of the form, there are two buttons: 'Confirm' and 'Cancel'.

4. Click **Confirm**.


## Assign Accounts to Registered Devices

After the handset is registered to the base station, you can assign one or more outgoing lines or incoming lines for the handset.

**TIP**

You can only assign one outgoing line and one incoming line for the CP930W, and make sure that the outgoing line and the incoming line are the same lines.

1. Log in to the web user interface of W70B as an admin.
2. Go to **Account > Number Assignment**.

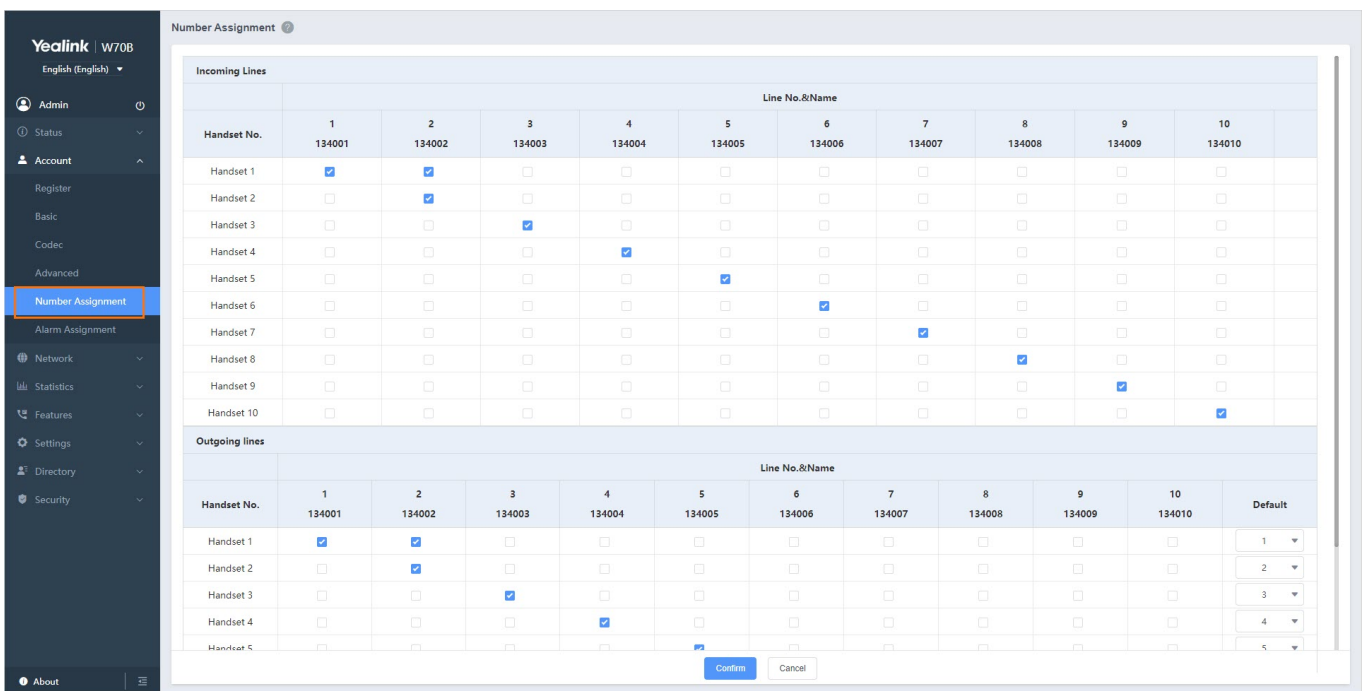

## Deploy W70B Single-Cell Solution

If you want to deploy multiple W70Bs with RT30 repeaters, see [Deploy W70B Single Cell Solution](#).

## FAQ

If there is a sudden power failure, what do I need to do after the power comes?