

FCC Warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor
Boston, MA 02215. USA
Tel : +1 (617) 566 - 9300
Fax: +1 (617) 249 - 1987
www.grandstream.com



FCC ID: YZZDP722



DP722

DECT Cordless HD Handset

For Warranty and RMA information, please visit
www.grandstream.com

Quick Installation Guide

Content

English.....	1
Español.....	5
Français.....	9
Deutsch.....	13
Italiano.....	17
Русскѣ.....	21
Português.....	25
Polski.....	29

The DP722 is not pre-configured to support or make emergency calls to any type of hospital, law enforcement agency, medical care unit ("Emergency Service(s)") or any other kind of Emergency Service. You must make additional arrangements to access Emergency Services. It is your responsibility to purchase SIP-compliant Internet telephone service, properly configure the DP722 to use that service, and periodically test your configuration to confirm that it works as you expect. It is also your responsibility to purchase traditional wireless or land-line telephone services to access Emergency Services.

GRANDSTREAM DOES NOT PROVIDE CONNECTIONS TO EMERGENCY SERVICES VIA THE DP722. NEITHER GRANDSTREAM NOR ITS OFFICES, EMPLOYEES OR AFFILIATES MAY BE HELD LIABLE FOR ANY CLAIM, DAMAGE, OR LOSS, AND YOU HEREBY WAIVE ANY AND ALL SUCH CLAIMS OR CAUSES OF ACTION ARISING FROM OR RELATING TO YOUR INABILITY TO USE THE DP722 TO CONTACT EMERGENCY SERVICES, AND YOUR FAILURE TO MAKE ADDITIONAL ARRANGEMENTS TO ACCESS EMERGENCY SERVICES IN ACCORDANCE WITH THE IMMEDIATELY PRECEDING PARAGRAPH.

PRECAUTIONS

- Do not attempt to open, disassemble, or modify the device.
- Do not use a third party power adapter.
- Do not expose the device to temperatures outside the range of -10 °C to 50 °C (14 °F to 122 °F) in operation, 0 °C to 45°C (32 °F to 113 °F) in charging and -20 °C to 60 °C (-4 °F to 140 °F) in storage.
- Do not expose the DP722 at environments outside of the humidity range of 10-90% RH (non-condensing).

OVERVIEW

The DP722 is a DECT cordless IP phone that allows users to mobilize their VoIP network throughout any business, warehouse, retail store and residential environment. It is supported by Grandstream's DP750 and DP752 DECT VoIP base stations and delivers a combination of mobility and top-notch telephony performance. Up to five DP722 handsets are supported on each base station while each DP722 supports a range of up to 350 meters outdoors and 50 meters indoors from the base station. It touts a suite of robust telephony features including support for up to 10 SIP accounts per handset, full HD audio, a 3.5mm headset jack, push-to-talk, a speakerphone and more. When paired with Grandstream's DECT Base Stations, the DP722 offers a powerful cordless DECT solution for any business or residential user.

DP722 PACKAGE CONTENTS




1x DP722
Handset



2x Rechargeable
Batteries



1x Charging
Station



1x Quick Instal-
lation Guide




1x 5V Power
Adapter



1x Handset Belt Clip

DP722 HANDSET DESCRIPTION

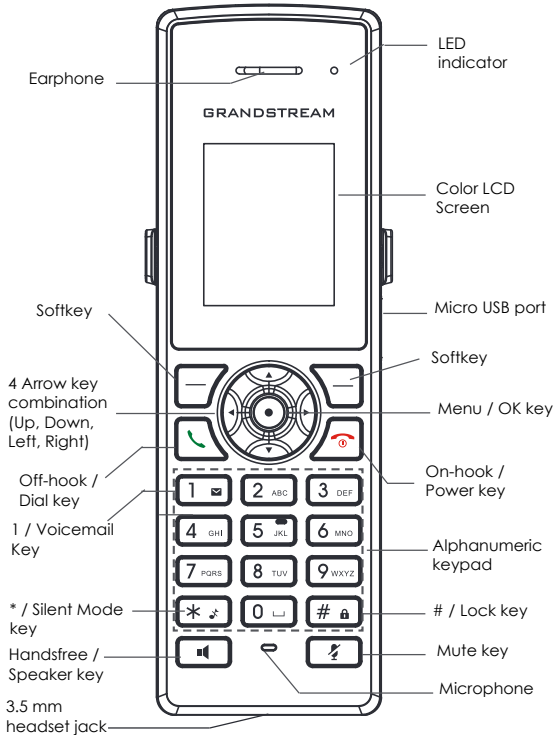


Refer to online documents and FAQ for more detailed information:
<http://www.grandstream.com/our-products>


SETTING UP DP722

Charging Station

Plug the power adapter into a power source socket to start using the charging station.




Charging Station Wall Mount (Optional)

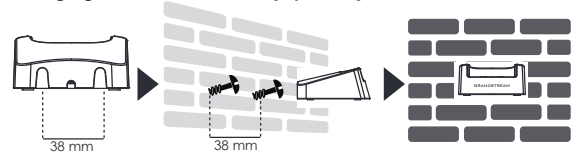

- Mark two dots horizontally with 38mm in between where to wall mount DP722 Charging Station.
- Using a drill, make a hole on each marked dot. Put a plastic expansion bolt and screw (not provided) on each hole. Let enough space on the screws to mount DP722 Charging Station.
- Mount the DP722 Charging Station on the screws using its "Wall Mount Slots".

Handset:

- Open the battery cover.
- Insert AAA batteries with correct polarity (+ / -).
- Close the battery cover.



Note: Please charge the battery fully before using the handset for the first time.

SUBSCRIBE DP722 HANDSETS TO DP750/DP752 BASE STATION

1. Open Subscription

- Access DP750/DP752 Web UI and press subscribe button.
- Or, press Subscribe/Page button on DP750/DP752 base station.



2. Handset Registration

1. Access to DP722 menu → Registration → Register.
2. Select "Base 1" and press "Subscribe" softkey.
3. DP722 will search for nearby base stations and will display RFPi code and base station name of the discovered DP750/DP752.
4. Press "Subscribe" to pair with displayed DP750/DP752.

