


4.5.3 DHLC4 Card (KX-NS5170)

Function

4-port digital hybrid extension card with Caller ID (FSK) for DPTs, APTs, SLTs, DSS consoles, and PT-interface CSs.

Note

When using a DHLC4 card, the LPR software version must be 2.0 or later.

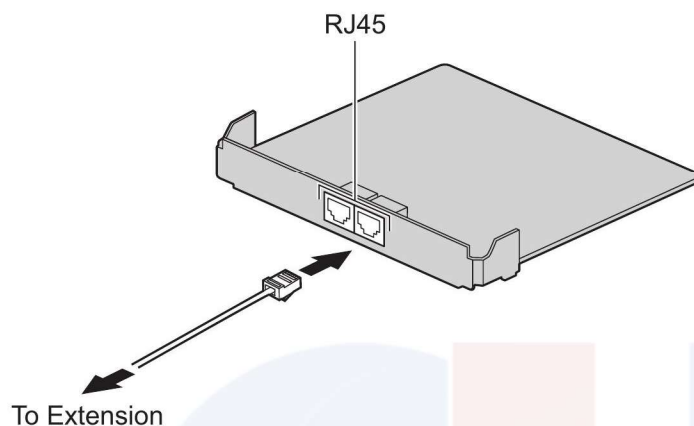


Accessories and User-supplied Items

Accessories (included): Spacer × 3, slot cover × 1

User-supplied (not included): RJ45 connector, Twisted pair cable

Pin Assignments

	No.	Signal Name	Function
	1	D1A	Data port 1 (low)
	2	D2A	Data port 1 (High)
	3	D1B	Data port 2 (low)
	4	TB	Tip port 2
	5	RB	Ring port 2
	6	D2B	Data port 2 (High)
	7	TA	Tip port 1
	8	RA	Ring port 1