


4.5 Physical CO Line and Extension Cards

4.5.1 LCOT6 Card (KX-NS5180)

Function

6 analog CO line ports with Caller ID (FSK/FSK with Call Waiting Caller ID [Visual Caller ID]/DTMF).

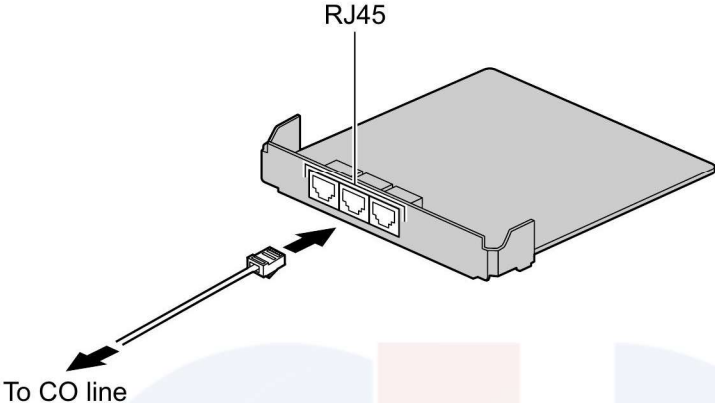

Accessories and User-supplied Items

Accessories (included): Spacer × 3, slot cover × 1
User-supplied (not included): RJ45 connector, Copper wire

CAUTION

- To reduce the risk of fire, use only No.26 AWG or larger (e.g., 24 AWG) UL Listed or CSA Certified Telecommunication Line Cord.

Note

- For details about power failure transfer, refer to "4.12 Power Failure Connections".
- To confirm the CO line connection, refer to "Confirming the CO Line Connection" in "4.13 Starting the PBX".

Pin Assignments

	No.	Signal Name	Function
	1	TA	Tip port 1
	2	RA	Ring port 1
	3	Reserved	–
	4	Reserved	–
	5	Reserved	–
	6	Reserved	–
	7	TB	Tip port 2
	8	RB	Ring port 2