

WF50

Dual Band Wi-Fi USB Dongle

Yealink WF50 is a next-generation Wi-Fi USB Dongle, designed to allow users to select whether to connect to a 2.4GHz (150 Mbps) Wi-Fi network or a 5GHz (up to 433 Mbps) Wi-Fi network. With wireless connections transitting over the 5GHz band, users no longer need to worry about the interference from nearby wireless devices which may interfere with their wireless signal, guaranteeing high-quality connections perfect for establishing calls and HD video streaming.

This dynamic plug-and-play style USB device is equipped with WPA/WPA2 encryptions, providing your network with active defense against security threats. Besides, WF50 owns the ability to establish Wi-Fi connectivity easily, quickly, and reliably, so that users can optimally communicate, collaborate and more.


Yealink WF50 is compliant with IEEE 802.11a/b/g/n/ac standard, maximazing reliability and throughput.




Key Features and Benefits

- WF50: compatible with Yealink SIP-T27G/T41S/T42S/T46S/T48S/T42U/T43U/T46U/T48U/T52S/T54S/T53 IP Phone (Version 84 or later) and Teams T55A/Skype for BusinessT55A/Teams T56A/Skype for BusinessT56A/Teams MP54/Skype for Business MP54
- WF50 (V1): compatible with Yealink SIP-T42U/T43U/T46U/T48U (108.86.0.70 or later), Yealink SIP-T53 (96.86.0.70 or later) and Teams MP54
- Dual-Band Connectivity
- High Transmission Rate
- Interference Free
- Reliable Connection
- Easy to Use
- Plug and Play

Specifications

Specifications	Description
<p>Specifications</p>	<ul style="list-style-type: none"> · Network Standard: IEEE 802.11 a/n/ac, IEEE 802.11 b/g/n · Transmission Rate: <ul style="list-style-type: none"> - 5 GHz: <ul style="list-style-type: none"> 11ac: Up to 433Mbps(dynamic) 11n: Up to 150Mbps(dynamic) 11a: Up to 54Mbps(dynamic) - 2.4 GHz: <ul style="list-style-type: none"> 11n: Up to 150Mbps(dynamic) 11g: Up to 54Mbps(dynamic) 11b: Up to 11Mbps(dynamic) · Frequency Range: 2.4 GHz/5 GHz · OS Support: Linux, Android · Antenna Type: Integrated · Security: WEP, WPA/WPA2,WPA-PSK/WPA2-PSK, WPA2-Enterprise · Interface: USB 2.0 · Operating Voltage: 5.0 V DC \pm5% · Dimensions (L x W x H): 52 mm x 27 mm x 8 mm · Weight: 28 g · Operating Temperature: 0°C to +40°C (32°F to 104°F) · Storage Temperature: -30°C to +70°C (-22°F to 158°F) · Operating Humidity: 10% to 90% (Non-condensing)
<p>Package Features</p>	<ul style="list-style-type: none"> · Package Content: <ul style="list-style-type: none"> - WF50 - User Guide · Qty/CTN: 80 PCS · N.W/CTN: 1.70 kg · G.W/CTN: 2.20 kg · Giftbox size: 136 mm x 70 mm x 40 mm · Carton meas: 443 mm x 305 mm x 285 mm
<p>Certifications</p>	<div style="text-align: center;">  <p>IC: 10741A-WF50</p> </div>

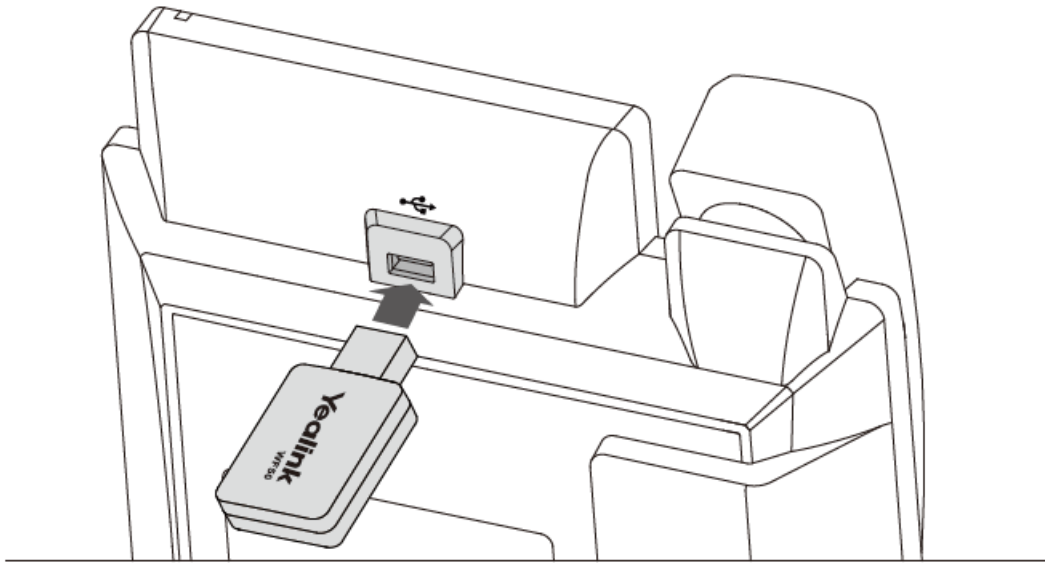

[Click Here](#) to go to the product introduction on the Yealink official website.