

## 3-party conference

- 1.Once in line with 1st caller, press Conf soft key, 1st caller is put on hold.
- 2.Then call the 2nd number.
- 3.After, 2nd call is established, press Conf soft key to set up the conference.

## Call transfer

### Attended transfer:

- 1.Press XFER soft key during the active conversation, the call is put on hold.
- 2.Dial the second telephone number.
- 3.When the call is answered, then press XFER soft key to complete the operation.



### Blind transfer:

- 1.Press XFER soft key during the active conversation, the call will be on hold.
- 2.Then enter the 2nd telephone number and press XFER soft key.



## Call forward

- 1.Press Menu > 2 Features > 1 Call Forward.
- 2.Select the line, the type of forward, enter the destination number and status and Save.

## Call Mute

- 1.Press  to Mute the microphone during the call.
- 2.Press  again to un-mute the conversation.

## Call list

- 1.Press History soft key or Menu > 6 Call Logs > 1 Local Call Logs
- 2.Scroll through the list using for Prev. or Next soft or 
- 3.To dial an entry, press Dial soft key or pickup handset or press  or step on the foot switch.

## Phonebook


### Access phonebook:

- 1.Press Dir soft key.
- 2.Select Contacts.
- 3.To dial an entry, press Dial soft key or press  or step on the foot switch.

### Add new entry:

- 1.Press Dir soft key > 1 Contacts> Press Add.
- 2.Enter name and number and press Save soft key.

## Redial


- 1.Press Redial soft key, select the desired call and press Dial soft key or press , or step on the foot switch.

## Do not disturb


- 1.Press DND soft key, or Menu > 2 Features > 5 DND.
- 2.Select the Mode and Type, and press Save soft key.

## Voice mail

- 1.To access your voice mailbox, press or Menu > 4 Applications > 3 Voice Message, number of messages will be indicated if provided by your server or pbx.
- 2.Select the line and press Dial to call.



X2P



X2C/X2CP

# X2P / X2C / X2CP Quick Installation Guide

Fanvil Technology Co., Ltd

Website: [www.fanvil.com](http://www.fanvil.com)

E-Mail: [sales@fanvil.com](mailto:sales@fanvil.com) [support@fanvil.com](mailto:support@fanvil.com)

Tel: +86-755-2640-2199 Fax: +86-755-2640-2618


Add: 10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, China

Fanvil Technology Co., LTD.

[www.fanvil.com](http://www.fanvil.com)

P/N:CJBA100024B0


## Packaging list

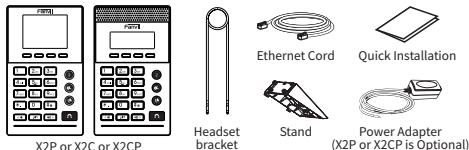

## Screen icon




## Keys features

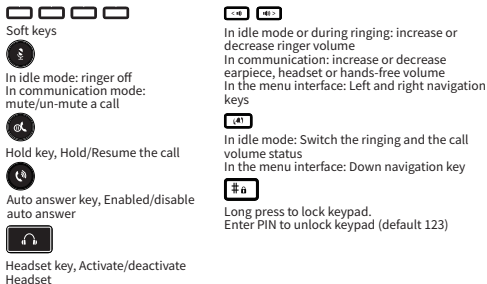

## Installation the device


### Bracket installation



### Connecting to the Device

Please connect power adapter, network, PC, headset, and foot switch to the corresponding ports as described in below picture.

- ① Power port: connect the power adapter.
- ② PC port: the network port connect to the computer.
- ③ Network port: connecting local area network or internet.
- ④ Foot switch port: connecting foot switch.
- ⑤ Headset port: connect headset.
- ⑥ Monitor port: connection monitoring headset (no microphone)



## Configuration

### Configuration via Phone

1. Press Menu > 3 Setting > 2 Advanced Settings (Default password 123)
2. Select Network: To configure the Network Settings (DHCP/Static/PPPoE)
3. Select Accounts: To configure enable the account, fill the SIP server address, port, user name, password etc.

### Configuration via Web

1. Get the IP address from the phone: Press Menu > 1 Status > 2 IP.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both 'admin').
3. Configure: Select network/Account etc, and fill the relevant content.

### Language setting

1. Press Menu key > 3 Settings > 1 Basic Settings > 7 Language.
2. Select the desired language and press Save soft key.

### Making a call

1. **Pre-dialing:** enter the phone number and press
2. **Direct dialing:** press and enter the phone number.
3. **Headset:** enter phone number and press or vice versa.

### Accepting a call

1. With a headset: or step on the foot switch.

### Putting a call on hold

1. Press key or Hold soft key, caller is put on hold.
  2. To retrieve the call press key or Resume soft key.
- Note: with more than one active call, select desired call with the key and use the corresponding soft key to hold or resume.